

VW Golf 3 Kitcar





Driver:			Event: Gravel				
Car Nr.. : KIT-CAR VWM			Date:				
Engine-Nr: 1 HK 000 VWM			ECU-BOSCH 2.2				
	Front axle			Rear axle			
Suspension							
Spring (N/mm or Type)			300-60-40		300-60-40		
Helper spring (N/mm or Type)			60-60-60		50.60-30		
Type of absorber			Gravel		Gravel		
Absorber adjustment (Z / D)			3/0 - 5/2	3/0 - 5/2	10/8 - 15/10 10/8 - 15/10		
Spring travel limiter Ø/length			44	43	40 42		
Steering lock / stroke			16/51				
Anti-roll bar (D=mm)			without		Standard		
Level height (see sketch)			210	210	245 245		
Length of spring pack			365	365	395 395		
Tie rod height (top/below)			10 / 6				
Leading joint (s.sketch)			17mm				
Position of dome plate (see sketch)			0	0			
Castor (°)			4°50`	4°50`			
Camber(°)			-1°20`	-1°20`	-1°20`    -1°20`		
Camber disk							
Trace (mm)				0		+4	
Brake							
Brake disk			295x28		265x10		
Caliper			AP 4 Piston		AP 2 Piston		
Master brake cylinder			0,75“		7/8“		
Hand brake cylinder			0,7“				
Brake pad quality			RS 14		RS 4-2		
Clutch							
Clutchdisk			AP stiff 200				
Clutch cylinder			0,75“				
Wheels							
Rim			7x15		7x15		
Tire dimension			205/65x15		205/65x15		
Tire pressure			2,0		2,0		
Transmission		Nr.:VWM	Wheel set: Kit - Car				
Final drive i			4,23				
Differential		Nr.:	Type: Lamella				
Ramp angle			On 30			Off 90	
Friction surfaces per side			6				
Preload (Nm) / Mounting clearance (mm)			160 N/m		0,22		
Weight:		FL	FR	BL	BR		

VW Golf 3 Kitcar




Front axle

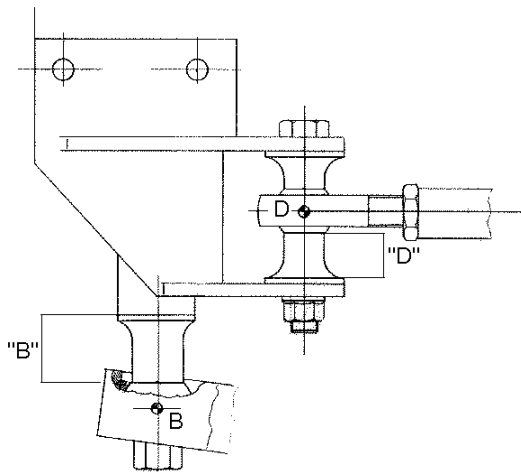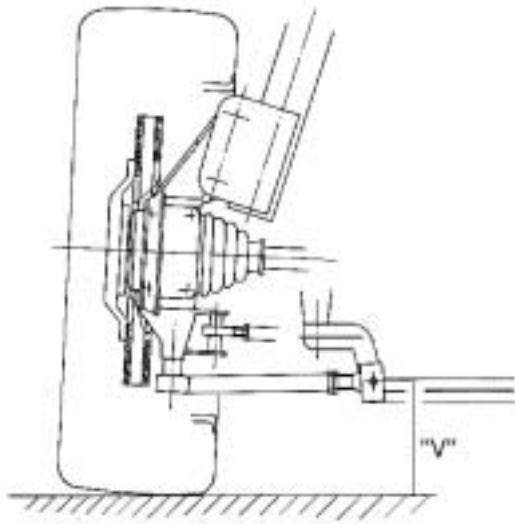


Mounting variation

Position of dome plate left

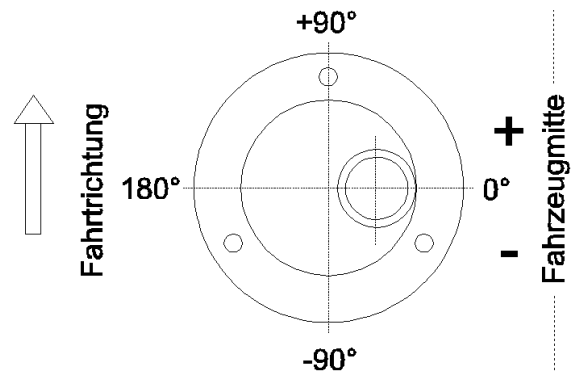

Hinterachse

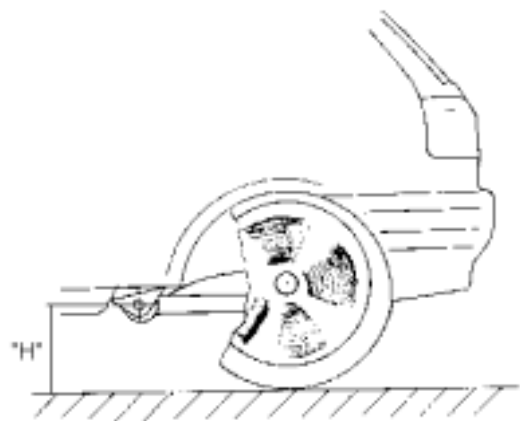

VW Golf 3 Kitcar

